

CAST IRON RING AND COVER,
 MARKED "SEWER" PER
 WSDOT STANDARD PLAN B-85.40-00

"O" RING SEAL, INTERNAL GRIPPING
 MECHANICAL PLUG WITH WING NUT.
 TOP COVER OF PLUG SHALL BE
 GREATER THAN 6" DIA. CHERNE
 ECON-O-GRIP MECHANICAL PLUG OR
 APPROVED EQUAL (SEE NOTE 2)

FINISHED GRADE

TRENCH BACKFILL

30" X 30" X 15"
 CONCRETE PAD


COMPACTED BEDDING
 MATERIAL FOR SUPPORT

6" WYE

6" RISER

6" 45° BEND

PLUG (UNLESS
 OTHERWISE NOTED)

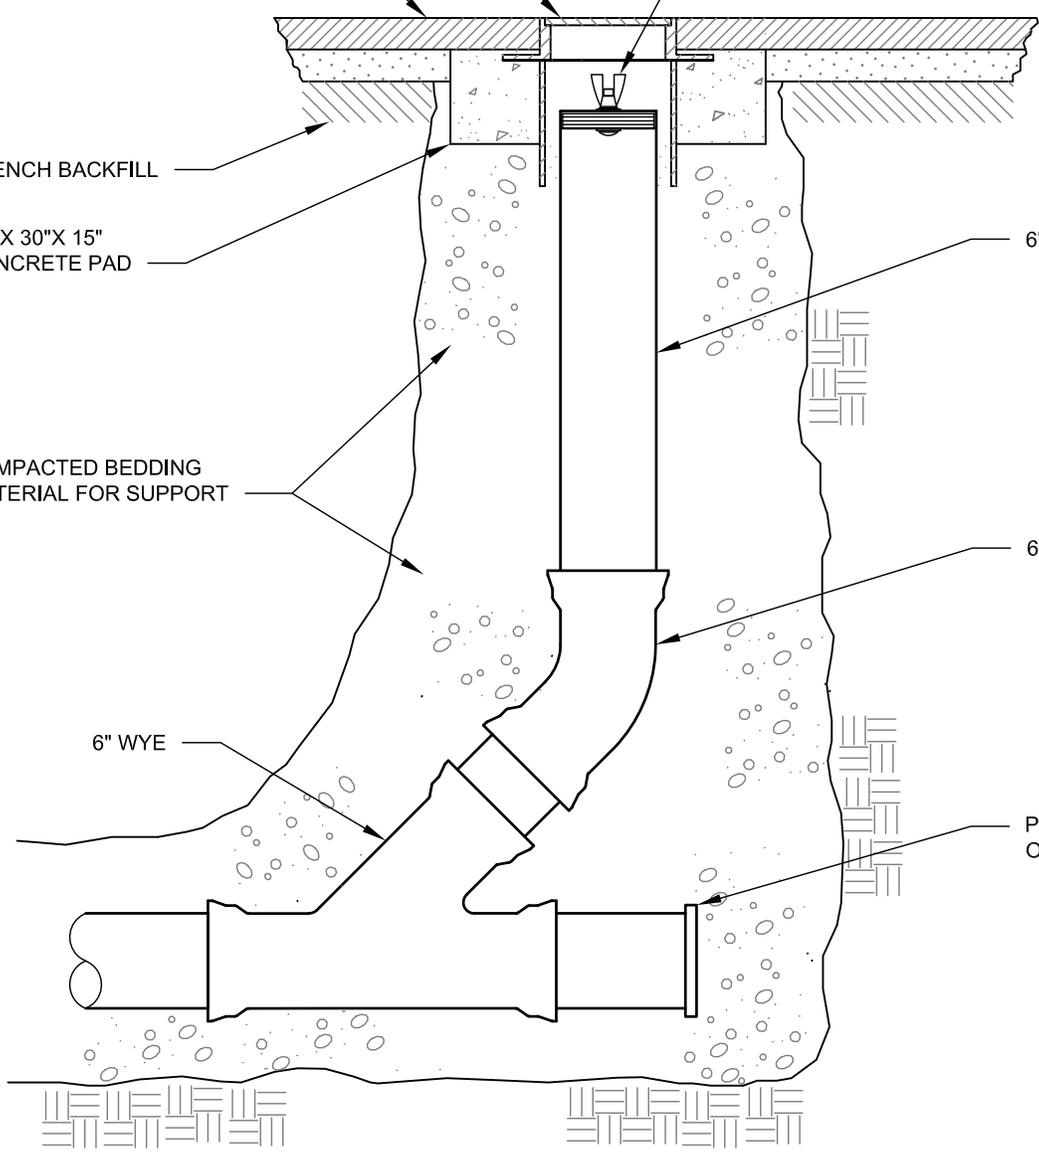

SECTION
 NTS

NOTES:

1. IN NON-SINGLE FAMILY RESIDENTIAL DEVELOPMENTS WHEN THE CLEANOUT IS LOCATED IN THE LANDSCAPE AREA, INSTALL A VALVE MARKER POST (NOT SHOWN), PAINTED FOREST GREEN (FARWEST PAINT, #388).
2. DEFORM END OF THREAD ON MECHANICAL PLUG BOLT TO SECURE WING NUT IN PLACE.

Scott Thomasson

APPROVED BY: SCOTT THOMASSON
 WATER/WASTEWATER ENGINEERING MANAGER

REVISION DATE: JULY 01, 2014



City of Redmond
 WASHINGTON

STANDARD DETAILS

SIDE SEWER CLEANOUT

FILE NAME: SD810.DWG

DETAIL NUMBER: **810**