
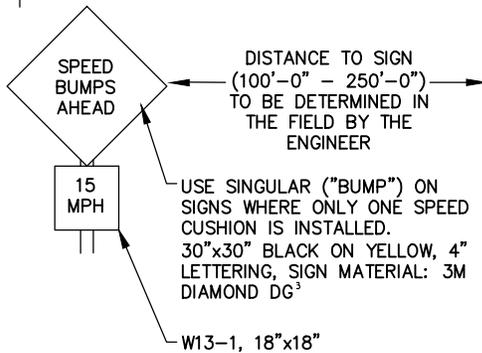


SPEED CUSHION
NTS

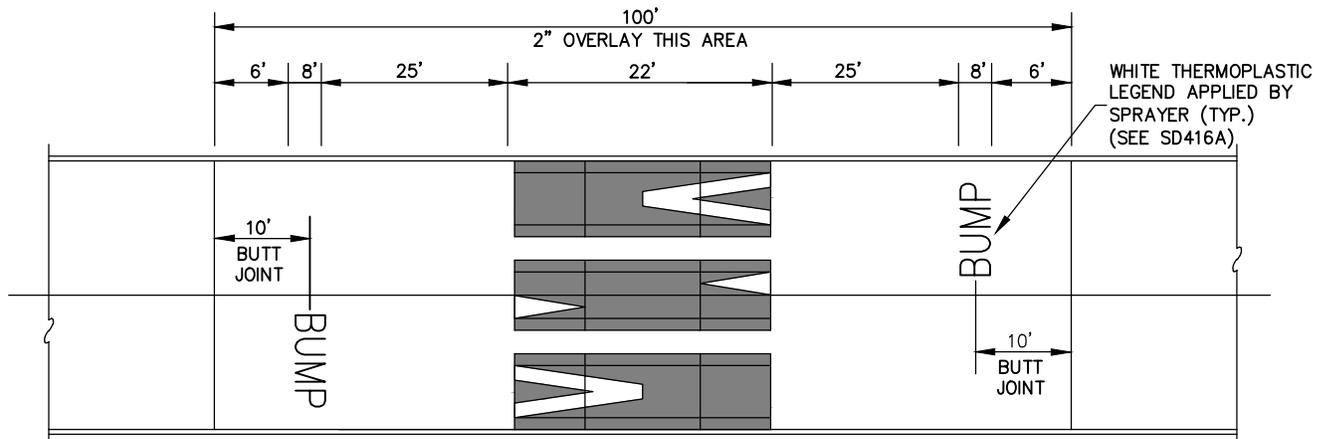

NOTES:

1. SIGNS & MARKINGS TYPICAL BOTH DIRECTIONS.
2. SEE "POST MOUNTED SIGN" STANDARD DRAWING 426(C) OR (D).
3. A TEMPLATE MUST BE USED IN SHAPING SPEED TABLE.
4. SPEED TABLE MUST BE MADE IN TWO LIFTS.
5. 2" OVERLAY NOT REQUIRED FOR NEW PAVEMENT OR EXISTING PAVEMENT DETERMINED TO BE IN GOOD CONDITION BY THE ENGINEER.

Rob Crittenden
APPROVED BY: ROB CRITTENDEN
TRAFFIC OPERATIONS SAFETY AND ENGINEERING MANAGER
REVISION DATE: JULY 01, 2015



STANDARD DETAILS
SPEED CUSHION
(1 OF 2)

FILE NAME: SD482.DWG DETAIL NUMBER: 482