




PLAN VIEW
NTS


IF THIS AREA IS LESS THAN 2'-0" WIDE THEN AREA MUST BE CONCRETE.

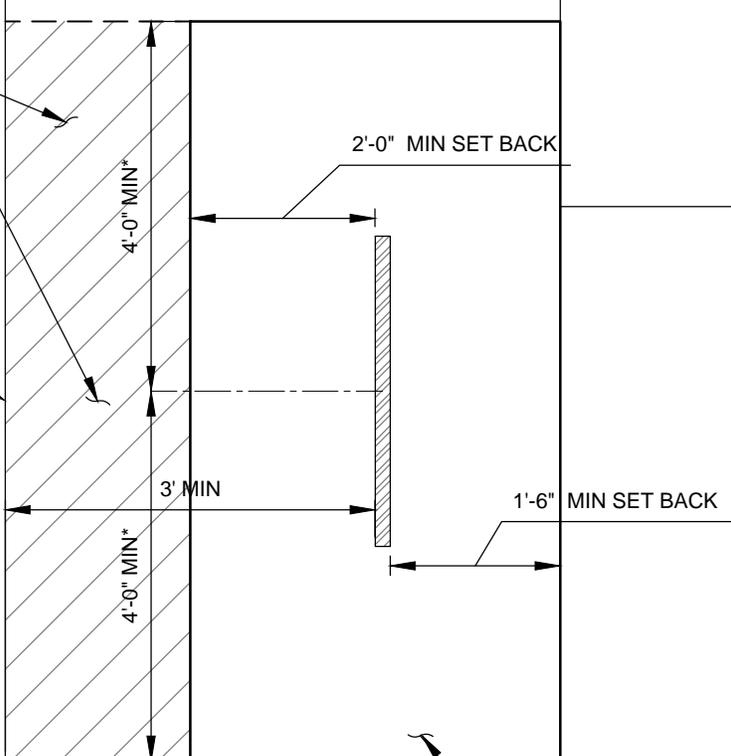

BACK OF CURB

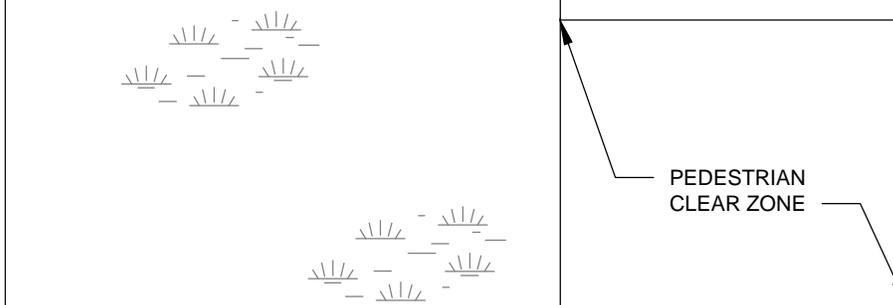

8'-0" MIN X 4'-0" MIN CONCRETE PAD. SEE NOTES 1, 2 AND 3.

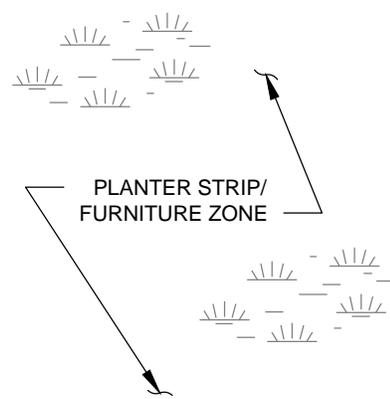

NOTES:

1. PAD MUST BE SET BACK MIN 5'-0" FROM ANY CITY UTILITY ACCESS.
2. FOLLOW STANDARDS SET FORTH IN DETAIL 303 FOR SIDEWALKS.
3. NO PERMANENT OBJECTS OTHER THAN A BICYCLE RACK MAY BE INSTALLED ON PAD.

* DENOTES CENTER OF RACK

Donald Cairns

APPROVED BY: DONALD CAIRNS
TRANSPORTATION PLANNING AND ENGINEERING MANAGER

REVISION DATE: MARCH 01, 2016



City of Redmond
WASHINGTON

STANDARD DETAILS

ON STREET BICYCLE PARKING

FILE NAME: SD318.DWG

DETAIL NUMBER: 318